


# COLUMBIA COUNTY WATER UTILITY CONSTRUCTION STANDARDS AND SPECIFICATIONS



WATER UTILITY ENGINEERING AND INSPECTIONS DEPARTMENT

MARCH 2010  
REVISED: JULY 2014

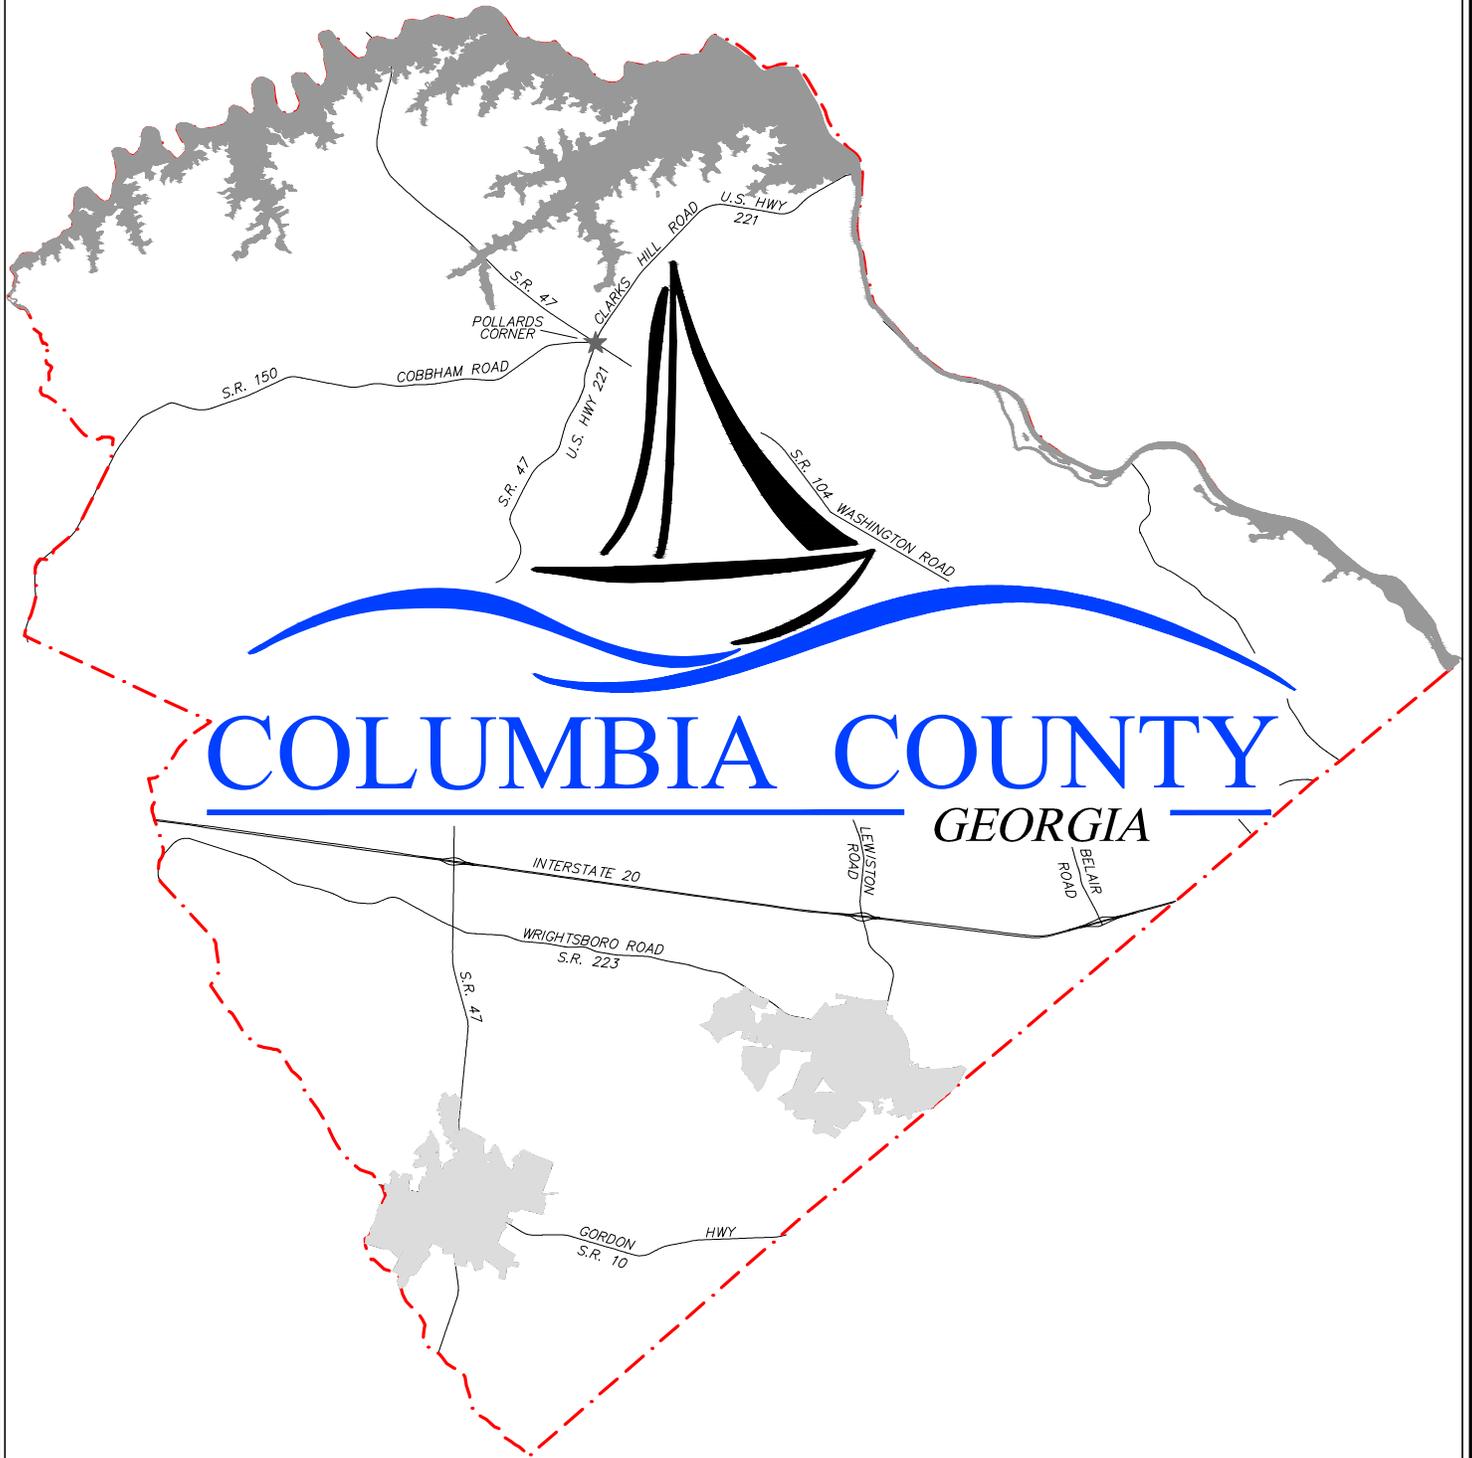

**COLUMBIA COUNTY WATER UTILITY  
CONSTRUCTION STANDARDS AND SPECIFICATIONS**

March 2010, Revised July 2014

Columbia County Water Utility Administrative Office

2140 William Few Parkway  
Grovetown, GA 30813  
P.O. Box 960  
Grovetown, GA 30813  
706-863-6928

Columbia County Water Utility Engineering and Inspections Department

706-651-0433 Office  
706-651-0648 Fax

Please direct any questions concerning specifications or details to the Columbia County Water Utility Engineering and Inspections Department.

All documents are available free via the Columbia County Website under the Water Utility Engineering and Inspection section. All documents are in Adobe Acrobat format and downloadable. Complete bound copies may be purchased from the Administrative Office.

It is the sole intent of these documents to facilitate the design and construction of all water and sanitary sewer utilities and associated appurtenances for Columbia County, Georgia. All other County Ordinances and Standards and Specifications shall apply as required during the design and construction of the water and sewer facilities. For more information concerning all other design and construction in Columbia County, see the Columbia County Construction Standards on file with the Development Services Department.

Erosion and Sediment Control design, construction, inspections and enforcement shall be reviewed and governed by the Columbia County Development Services Department.

# COLUMBIA COUNTY WATER UTILITY CONSTRUCTION STANDARDS AND SPECIFICATIONS

## TABLE OF CONTENTS

|                         |  |                            |
|-------------------------|--|----------------------------|
| <b>SECTION 11.0</b>     | <b>SANITARY SEWER AND WATER DISTRIBUTION<br/>DESIGN CRITERIA</b>   | <b>11-1 thru 11-19</b>     |
| 11.1                    | Plan Submittal, Extensions, Standard Details, Standard Notes,<br>As Built Submittal, Final Plat Submittal, and Final Package Submittal | 11-1 thru 11-8             |
| 11.2                    | GDOT Utility Encroachment Permits  | 11-8 thru 11-9             |
| 11.3                    | Sanitary Sewer Design  | 11-9 thru 11-14            |
| 11.4                    | Lift Station Design  | 11-14 thru 11-16           |
| 11.5                    | Water Distribution System Design   | 11-16 thru 11-20           |
|                         | Sanitary Sewer Extension Forms   | Appendix A                 |
|                         | Water Line Extension Form  |                            |
|                         | Development – Water Supply & Demand Calculations   | Appendix B                 |
|                         | Water System Demand and Sanitary Sewer Contribution Form<br>(Single Site Only)   | Appendix AB                |
|                         | Water Meter Flow & Head Loss Design Information  | Appendix C                 |
|                         | Project Construction Cost Form   | Appendix D                 |
|                         | Sewer Flow Test Request Form   | Appendix E                 |
|                         | Water Flow Test Request Form   | Appendix F                 |
|                         | GDOT Encroachment Permit Check List  | Appendix G                 |
|                         | Sanitary Sewer Basin Map & WWTP Locations  | Appendix H                 |
|                         | Water System Pressure Zone Map   | Appendix I                 |
|                         | Development Plan Review Check List   | DPRC-1 thru 2              |
|                         | Final Plat / Easement Plat Review Check List   | PRC-1                      |
|                         | As Built Review Check List   | ARC-1                      |
| <br><b>SECTION 12.0</b> | <br><b>SANITARY SEWER SYSTEM CONSTRUCTION</b>  | <br><b>12-1 thru 12-29</b> |
| 12.1                    | Construction of Gravity Sanitary Lines   | 12-1 thru 12-3             |
| 12.2                    | Protection of Existing Utilities and Restoration of Property   | 12-3                       |
| 12.3                    | Work Site Safety   | 12-3 thru 12-4             |
| 12.4                    | Warranty of Work   | 12-4                       |
| 12.5                    | Materials  | 12-4 thru 12-9             |
| 12.6                    | Gravity Sewer Line Installation  | 12-9 thru 12-10            |
| 12.7                    | Dewatering and Drainage of Excavated Areas   | 12-10                      |
| 12.8                    | Protection Against Flotation   | 12-10 thru 12-11           |
| 12.9                    | Shoring and Protection of Excavation   | 12-11                      |
| 12.10                   | Blasting   | 12-11                      |
| 12.11                   | Trench Excavation  | 12-11 thru 12-13           |
| 12.12                   | Pipe Laying  | 12-14 thru 12-15           |
| 12.13                   | Testing of Gravity Sanitary Sewer Lines  | 12-15 thru 12-17           |
| 12.14                   | Standard Manholes  | 12-17 thru 12-22           |

**COLUMBIA COUNTY WATER UTILITY  
CONSTRUCTION STANDARDS AND SPECIFICATIONS**

**TABLE OF CONTENTS**

|       |  |                  |
|-------|--|------------------|
| 12.15 | Air Release Valve (ARV) Manholes           | 12-22            |
| 12.16 | Service Laterals                           | 12-22 thru 12-23 |
| 12.17 | Bore and Jack Crossings / Creek Crossings  | 12-23 thru 12-24 |
| 12.18 | Aerial Crossings                           | 12-24 thru 12-25 |
| 12.19 | Force Main                                 | 12-25 thru 12-26 |
| 12.20 | Force Main Valves                          | 12-26 thru 12-27 |
| 12.21 | Miscellaneous Equipment                    | 12-28            |
| 12.22 | Final Inspections                          | 12-29            |
|       | Sanitary Sewer Line Air Testing Data Sheet | 12-30            |
|       | Manhole Vacuum Testing Data Sheet          | 12-31            |

**SECTION 13.0            LIFT STATION CONSTRUCTION            13-1 thru 13-20**

|       |                                       |                  |
|-------|---------------------------------------|------------------|
| 13.1  | Construction of Lift Station          | 13-1 thru 13-3   |
| 13.2  | Precast Wet Well and Valve Vault      | 13-3 thru 13-6   |
| 13.3  | Pump Design / Construction            | 13-6 thru 13-9   |
| 13.4  | Motor Design / Construction           | 13-9             |
| 13.5  | Lift Station Control Center           | 13-9 thru 13-13  |
| 13.6  | Primary Control System                | 13-13 thru 13-14 |
| 13.7  | Primary Level Sensor                  | 13-14            |
| 13.8  | Backup Level Sensor                   | 13-15            |
| 13.9  | As Built Drawings and Diagrams        | 13-16            |
| 13.10 | Instrumentation and Control           | 13-16 thru 13-18 |
| 13.11 | Lift Station Control Center Framework | 13-18            |
| 13.12 | Lift Station Access Road              | 13-18            |
| 13.13 | Lift Station Site                     | 13-19            |
| 13.14 | Fencing                               | 13-19            |
| 13.15 | Miscellaneous Equipment               | 13-19 thru 13-20 |

**SECTION 14.0            WATER DISTRIBUTION SYSTEM CONSTRUCTION            14-1 thru 14-31**

|       |                                |                  |
|-------|--------------------------------|------------------|
| 14.1  | Construction of Water Lines    | 14-1 thru 14-3   |
| 14.2  | Materials                      | 14-3 thru 14-4   |
| 14.3  | Pipe Specifications            | 14-4 thru 14-9   |
| 14.4  | Water Line Installation        | 14-9 thru 14-12  |
| 14.5  | Pipe Laying                    | 14-12 thru 14-14 |
| 14.6  | Fittings                       | 14-14            |
| 14.7  | Fitting Installation           | 14-15            |
| 14.8  | Gate Valves                    | 14-15 thru 14-16 |
| 14.9  | Gate Valve Installation        | 14-16 thru 14-17 |
| 14.10 | Service Line and Appurtenances | 14-17 thru 14-19 |

**COLUMBIA COUNTY WATER UTILITY  
CONSTRUCTION STANDARDS AND SPECIFICATIONS**

**TABLE OF CONTENTS**

|       |   |                  |
|-------|---|------------------|
| 14.11 | Service Line Installation                       | 14-19            |
| 14.12 | Meter Boxes / Meter Vault                       | 14-19 thru 14-20 |
| 14.13 | Meter Box / Meter Vault Installation            | 14-20 thru 12-21 |
| 14.14 | Hydrants  | 14-21 thru 14-22 |
| 14.15 | Hydrant Installation                            | 14-22            |
| 14.16 | Tapping Sleeves / Service Saddles               | 14-22 thru 14-23 |
| 14.17 | Tapping Sleeve / Service Saddle Installation    | 14-23 thru 14-25 |
| 14.18 | Bore and Jack Crossings                         | 14-25 thru 14-26 |
| 14.19 | Creek Crossings                                 | 14-26            |
| 14.20 | Hydrostatic Testing (Pressure and Leakage)      | 14-26 thru 14-27 |
| 14.21 | Chlorination / Disinfection                     | 14-27 thru 14-30 |
| 14.22 | Connections or Repairs to Existing Water System | 14-30 thru 14-31 |
| 14.23 | Final Inspection                                | 14-31            |

**STANDARD DETAILS**

STANDARD DETAILS TABLE OF CONTENTS

TCSD-1 thru TCSD-2

STANDARD DETAILS